


EMBEDDED Plug & Play NVR

Model #: NVR-5204P4

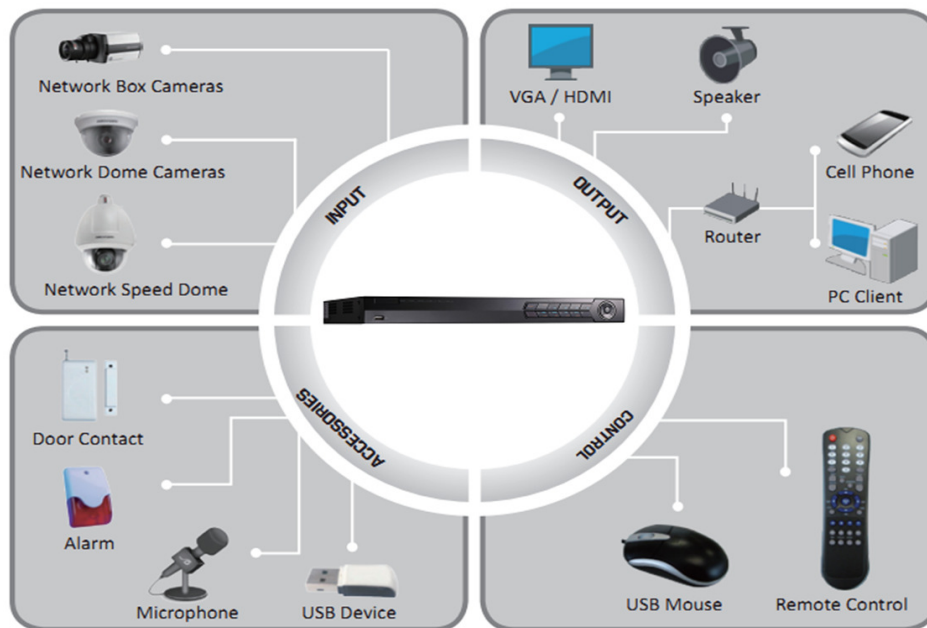

Features

- 4-ch video input
- 4 independent PoE network interfaces plug in & play
- HDD quota and group management
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- 4-ch synchronous playback

Technical Specifications

Model No.	NVR-5204P4		
Video/Audio input			
Video compression	H.264		
Video input	4-ch		
Incoming Bandwidth	20 Mbps		
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)		
Video /Audio output			
HDMI output	1-ch, resolution: 1920 x 1080P /60 Hz ,1600 x 1200 /60 Hz, 1280 x 1024 /60 Hz, 1280 x 720 /60 Hz, 1024 x 768 /60 Hz		
VGA output	1-ch, resolution: 1920 x 1080P /60 Hz ,1600 x 1200 /60 Hz, 1280 x 1024 /60 Hz,1280 x 720 /60 Hz, 1024 x 768 /60 Hz		
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 x 576, NTSC: 704 x 480		
Video spot output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 x 576, NTSC: 704 x 480		
Encoding resolution	5MP / 3MP / 1080p / UXGA / 720p / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF		
Frame rate	30 fps		
Video bit rate	32 Kbps ~ 8192 Kbps, or user defined (Max. 8192 Kbps)		
Audio output	1-ch, RCA (Linear, 600 Ω)		
Audio bit rate	16 Kbps		
Dual-stream	Support (Sub-stream at CIF / QCIF: 30fps)		
Stream type	Video, Video & Audio		
Playback resolution	5MP / 3MP / 1080P / UXGA / 720P / 4CIF / VGA / DCIF / 2CIF / CIF / QCIF		
Synchronous playback	4-ch 720P / 2-ch 1080P / 1-ch 5MP		
Hard Disk			
SATA	2 SATA interfaces		
Capacity	Up to 4TB capacity for each disk		
External interface			
Network interface	1 RJ-45 10 / 100 / 1000 Mbps self-adaptive Ethernet interface independent 10 / 100 Mbps PoE Ethernet interfaces		4
Serial interface	1 RS-485 half-duplex interface		
USB interface	2 x USB2.0		
Alarm in/out	4 to 1		
General			
Power supply	100 ~ 240 VAC, 47 ~ 63 Hz, 3A		
Consumption	≤15 W		
Working temperature	14°F - 131°F		
Working humidity	10% ~ 90%		
Chassis	19-inch rack-mounted 1U chassis		
Dimensions	445 × 290 × 45mm		
Weight	< 2 Kg		

Rear Panel of NVR



1. LAN Network Interface
2. RS-485 Interface
3. 100 ~ 240 VAC Power Input
4. Power Switch
5. USB Interface
6. GND
7. HDMI Interface
8. VGA Output
9. Audio In
10. Audio Out
11. Network Interfaces with PoE function

We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative

Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com

www.dss-cctv.com